




■ **Applications:**

Used where harness does not require high tensile strength

- **Material:** Polypropylene
- **Color:** Black
- **Operating Temp:** -40°C to +85°C
- **Unit:** 100 Pcs/Pkt

**Features:**

- Suitable for low cost bunching application

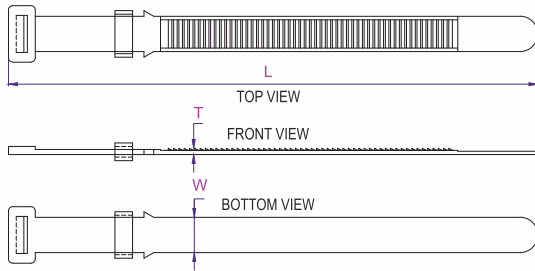

Length (mm)	Width (mm)	Length (inch)	Ten. Str.		Max. Bun. Dia (mm)	Cat No.
			Kgs	Lbs		
150	10.0	5.9	08	18	30 (1.18)	SLBT-150
210	10.0	8.2	08	18	50 (1.96)	SLBT-210

\* Tolerance Dimension (mm):- Length -  $\pm 3$ , Width -  $\pm 0.2$ , Thickness -  $\pm 0.1$