




DOUBLE LOCK TIE

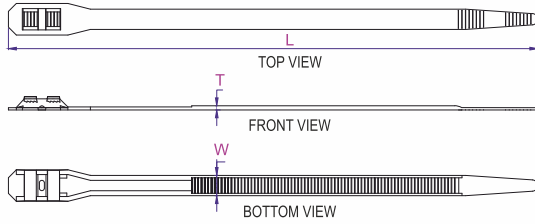

Applications:

For securing & bundling of cables in utility and construction industries.

- **Material** Nylon 66
- **Color:** Natural, Black, UV Black
- **Operating Temp:** -40°C to +85°C
- **Unit:** 100 Pcs/Pkt

Features:

- Provides better tensile strength as compared to standard ties
- Outer side serrations on tie eliminates the risk of damaging cables
- Double locking head offers firm gripping without slipping

Length (mm)	Width (mm)	Length (inch)	Ten. Str.		Max. Bun. Dia (mm)	Natural 100 pcs. pack Cat. No.	Black 100 pcs. pack Cat. No.	UV Black 100 pcs. pack Cat. No.
			Kgs	Lbs				
235	9	9.25	55	121	52	SLD-235 H	SLD-235 H/B	SLD-235 H/U
300	9	11.81	55	121	72	SLD-300 H	SLD-300 H/B	SLD-300 H/U
360	9	14.17	55	121	91	SLD-360 H	SLD-360 H/B	SLD-360 H/U
510	9	20.08	55	121	139	SLD-510 H	SLD-510 H/B	SLD-510 H/U

Tolerance Dimension :- Length(mm)- ± 2 Width(mm)- ± 0.4 Thickness(mm)- ± 0.3