




# FIRE RETARDANT METAL TOOTH TIES

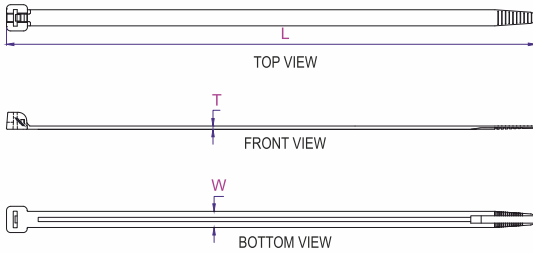

■ **Applications:**

- In fire hazardous area & for public transport where safety from fire is important
- For durable locking in the adverse conditions like humidity, heat, cold, vibration & external shocks

- **Material:** Nylon 6.6
- **Color:** Milky White
- **Operating Temp:** -40°C to +85°C
- **Unit:** 100 Pcs/Pkt

**Features:**

- Its self extinguish property does not allow the fire to travel further
- The corrosion proof, non-magnetic steel tooth firmly anchor inside the cabel tie length (body) with positive locking.
- No chances of slippage in adverse conditions

Length (mm)	Width (mm)	Length (inch)	Ten. Str.		Max. Bun. Dia (mm)	Cat No.
			Kgs	Lbs		
100	2.5	4.0	8	18	22	SLM-100 /F
200	2.5	8.0	8	18	50	SLM-200 /F
150	3.6	6.0	18	40	30	SLM-150 I/F
200	3.6	8.0	18	40	50	SLM-200 I/F
280	3.6	11.0	18	40	76	SLM-280 I/F
200	4.8	8.0	22	49	50	SLM-200 S/F
290	4.8	11.4	22	49	78	SLM-290 S/F
360	4.8	14.2	22	49	102	SLM-360 S/F
220	7.6	8.6	54	119	57	SLM-220 LH/F
300	7.6	11.8	54	119	80	SLM-300 LH/F
368	7.6	14.5	54	119	102	SLM-368 LH/F
538	7.6	21.2	54	119	158	SLM-538 LH/F
780	7.6	30.7	54	119	230	SLM-780 LH/F

\* Tolerance Dimension (mm):- Length - ± 4, Width - ± 0.4, Thickness - ± 0.4