




Applications:

For indoor wire/cable bunching, packing bags etc

- **Material:** Nylon 66
- **Color:** Natural, Black
- **Operating Temp:** -40°C to +85°C
- **Unit:** 100 Pcs/Pkt & 1000 Pcs/K

Features:

- Low cost
- Economical design
- Uncompromised tensile strength

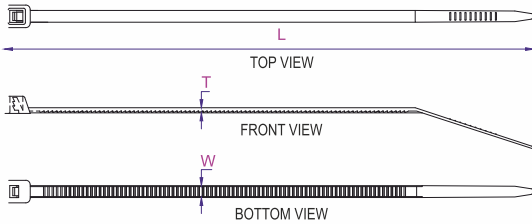

Length (mm)	Width (mm)	Length (inch)	Ten. Str.		Max. Bun. Dia (mm)	Natural 100 pcs pack Cat No.	Natural 1000 pcs pack Cat No.	Black 100 pcs pack Cat No.	Black 1000 pcs pack Cat No.
			Kgs	Lbs					
100	2.2	3.9	8	18	22	SLV-100	SLV-100 K	SLV-100/B	SLV-100 K/B
150	3.2	5.9	18	40	35	SLV-150 I	SLV-150 IK	SLV-150 I/B	SLV-150I K/B
200	3.2	7.9	18	40	50	SLV-200 I	SLV-200 IK	SLV-200 I/B	SLV-200 IK/B
200	4.2	7.9	22	49	50	SLV-200 S	SLV-200 SK	SLV-200 S/B	SLV-200 SK/B
250	4.2	9.8	22	49	65	SLV-250 S		SLV-250 S/B	
300	4.2	11.8	22	49	82	SLV-300 S		SLV-300 S/B	
355	4.2	14.0	22	49	100	SLV-355 S		SLV-355 S/B	
200	7.0	7.9	54	119	50	SLV-200 LH		SLV-200 LH/B	
250	7.0	9.8	54	119	65	SLV-250 LH		SLV-250 LH/B	
300	7.0	11.8	54	119	82	SLV-300 LH		SLV-300 LH/B	
350	7.0	13.8	54	119	100	SLV-350 LH		SLV-350 LH/B	
380	7.0	15.0	54	119	108	SLV-380 LH		SLV-380 LH/B	
400	7.0	15.7	54	119	110	SLV-400 LH		SLV-400 LH/B	
450	7.0	17.7	54	119	130	SLV-450 LH		SLV-450 LH/B	
500	7.0	19.7	54	119	148	SLV-500 LH		SLV-500 LH/B	
600	7.0	23.6	54	119	180	SLV-600 LH		SLV-600 LH/B	

* Tolerance Dimension (mm):- Length - ± 1 to 4, Width - ± 0.1 to 03, Thickness - ± 0.1 to 0.2