




Applications:

These are useful in wire harnessing where changes are anticipated during development, production or in the field, also used for temporary bag packing

- **Material:** Nylon 66
- **Color:** Natural, Black
- **Operating Temp:** -40°C to +85°C
- **Unit:** 100 Pcs/Pkt & 1000 Pcs/K

Features:

- The releasable cable tie permits easy release & reuse with a tab

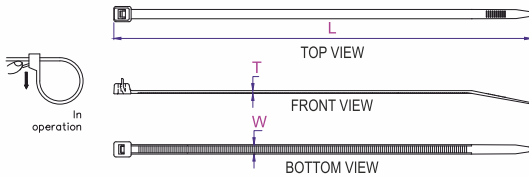

Length (mm)	Width (mm)	Length (inch)	Ten. Str.		Max. Bun. Dia (mm)	Natural 100 pcs pack Cat No.	Natural 1000 pcs pack Cat No.	Black 100 pcs pack Cat No.	Black 1000 pcs pack Cat No.
			Kgs	Lbs					
150	3.6	5.9	18	40	35	SLR-150 I	SLR-150 IK	SLR-150 I/B	SLR-150 IK/B
200	4.8	7.9	22	49	53	SLR-200 S	SLR-200 SK	SLR-200 S/B	SLR-200 SK/B
250	4.8	9.8	22	49	68	SLR-250 S		SLR-250 S/B	
315	4.8	12.4	22	49	86	SLR-300 S		SLR-300 S/B	
368	4.8	14.5	22	49	104	SLR-368 S		SLR-368 S/B	

* Tolerance Dimension (mm):- Length - ± 1 to 3, Width - ± 0.1 , Thickness - ± 0.1