



■ **Applications:**

Suitable for corrosive climate condition, higher temperature and higher tensile strength requirement.


■ **Material:** Stainless Steel SS 316, SS 304

■ **Operating Temp:** -80°C to +538°C

■ **Unit:** 100 Pcs/Pkt

Features:

- Designed for low cost & low tensile applications.
- Smooth edges of ties provide utmost safety while installation

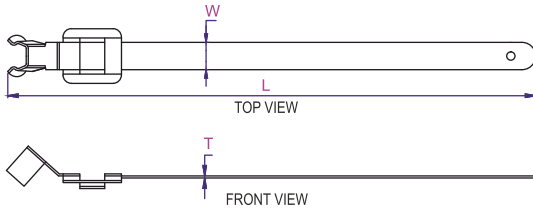

Length (mm)	Width (mm)	Thick (mm)	Max. Bun. Dia (mm)	Length (inch)	Width (inch)	Loop Ten. Str.		G.W. /100 pcs Kgs (lbs)	Cat No. SS 316	Cat No. SS 304
						Kgs	(Lbs)			
150	5.0	0.50	30	5.91	0.20	120 (264)		0.38 (0.85)	RTE-150	RTE-150/4
230	5.0	0.50	54	9.06	0.20	120 (264)		0.55 (1.21)	RTE-230	RTE-230/4
330	5.0	0.50	85	12.99	0.20	120 (264)		0.75 (1.65)	RTE-330	RTE-330/4
450	5.0	0.50	125	17.72	0.20	120 (264)		0.99 (2.18)	RTE-450	RTE-450/4
610	5.0	0.50	175	24.02	0.20	120 (264)		1.31 (2.88)	RTE-610	RTE-610/4
762	5.0	0.50	220	30.00	0.20	120 (264)		1.61 (3.551)	RTE-762	RTE-762/4
914	5.0	0.50	270	35.98	0.20	120 (264)		1.91 (4.220)	RTE-914	RTE-914/4