



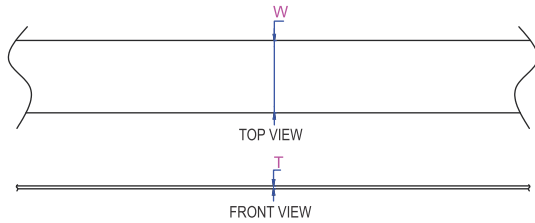

SS BAND HD UNCOATED

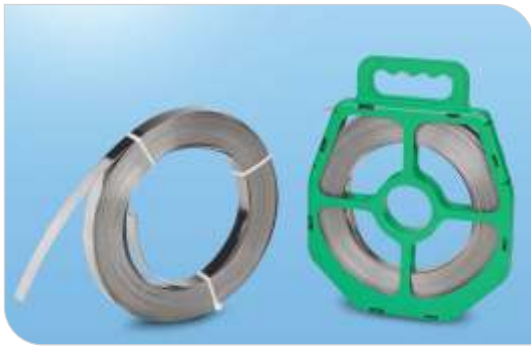

Applications:

Cable bundling application for higher tensile load and high vibration. For various size of cable diameter requirement.

■ **Material:** SS 316, SS 201 and Galvanized

■ **Operating Temp:** -80°C to +538°C

■ **Packing:** 30.5 Mtrs (100 Ft.)/Roll in box

Features:

- Provides higher tensile strength
- Ideal for use in high vibration application
- Available in cardboard box as well as in plastic totes for easy to carry & use.
- Smooth edges of band provide utmost safety while installation

Width		Thickness		SS Grade	Ten. Str.		Used with Buckle/Clip	Package Qty. per Roll	G.wt./Std. Pkg		Cat No.
(inch)	(mm)	(inch)	(mm)		Kgs	Lbs			Kgs	Lbs	
1/4	6.3	0.020	0.51	SS 316	180	397	SBB-6, SBC-6	30.5 Mtrs (100 Ft.)	0.77	1.7	SBH-6
1/4	6.3	0.020	0.51	SS 201	226	498	SBB-6, SBC-6	30.5 Mtrs (100 Ft.)	0.77	1.7	SBH-6/1
3/8	9.5	0.025	0.63	SS 316	340	750	SBB-9, SBC-9	30.5 Mtrs (100 Ft.)	1.50	3.3	SBH-9
3/8	9.5	0.025	0.63	SS 201	408	899	SBB-9, SBC-9	30.5 Mtrs (100 Ft.)	1.50	3.3	SBH-9/1
1/2	12.7	0.030	0.76	SS 316	543	1197	SBB-12, SBC-12	30.5 Mtrs (100 Ft.)	2.30	5.1	SBH-12
1/2	12.7	0.030	0.76	SS 201	680	1499	SBB-12, SBC-12	30.5 Mtrs (100 Ft.)	2.30	5.1	SBH-12/1
5/8	15.9	0.030	0.76	SS 316	680	1499	SBB-15, SBC-15	30.5 Mtrs (100 Ft.)	2.90	6.4	SBH-15
5/8	15.9	0.030	0.76	SS 201	850	1874	SBB-15, SBC-15	30.5 Mtrs (100 Ft.)	2.90	6.4	SBH-15/1
3/4	19.0	0.030	0.76	SS 316	815	1797	SBB-19, SBC-19	30.5 Mtrs (100 Ft.)	3.50	7.7	SBH-19
3/4	19.0	0.030	0.76	SS 201	1020	2249	SBB-19, SBC-19	30.5 Mtrs (100 Ft.)	3.5	7.7	SBH-19/1